

REVIEW OF THE 802.11 STANDARDS

(ORIGINAL ARTICLE FROM L-COM*)

Many of you are familiar with the term 802.11 – L-COM as recently published a very good article about this standard, which details some of the history of each version. Wireless Solution has decided to summarise this article, including some original references. Note the original is from L-COM, and Wireless Solution is referencing and crediting the original publisher, annexing the link to the original publication below.

802.11a

– released in 1999, this standard supported rates up to 54Mbps. It utilises 5 GHz only, a significantly less congested band (resulting in a lot less interference from other signals). The big disadvantage is the range, being less than what 2.4 GHz offers, as well as breaking barriers – these signals in 5GHz are more easily absorbed by walls and solid objects.

802.11b

– released in 1999, same year than the previous. It was initially widely adopted as this version was a lot less expensive than the former, having been adopted by the consumer market. It is better in travelling to further distances and

penetrating solid objects. However, it only supported up to 11Mbps. Because water reacts better to 2.4 GHz, there is a disadvantage in using outdoor, as trees and leaves may disturb its transmission. For outdoor use, **802.11a** is better than this version.

802.11g

– released in 2003, it operates in 2.4 GHz but it has a higher throughput of 54Mbps, and still backwards compatible with previous versions.

802.11n

– this was released in 2009 and designed with an increased throughput, utilising multiple antennas to increase data rate, now up to 600 Mbps. It uses both frequency bands 2.4 GHz and 5 GHz, with a superior indoor and outdoor coverage, essentially doubling the range of its predecessors. This uses a new technology – MIMO – Multiple-input Multiple-Output; It's a technique for sending and receiving more than one wireless signal on the same radio channel at the same time.

802.11ac

– This is the most recent standard, adopted in 2014, supporting rates up to 1.3 Gbps. It only uses 5 GHz, but it carries MU-MIMO, an advanced form of the technology in the previous version.

distance than the most flexible Wi-Fi standard (802.11n can travel circa 70m/225ft and W-DMX™ can travel 700m/23,000ft inline-of-sight). When approaching a complex project in a heavy

802.11 Wireless Standards					
IEEE Standard	802.11a	802.11b	802.11g	802.11n	802.11ac
Year Adopted	1999	1999	2003	2009	2014
Frequency	5 GHz	2.4 GHz	2.4 GHz	2.4/5 GHz	5 GHz
Max. Data Rate	54 Mbps	11 Mbps	54 Mbps	600 Mbps	1 Gbps
Typical Range Indoors*	100 ft.	100 ft.	125 ft.	225 ft.	90 ft.
Typical Range Outdoors*	400 ft.	450 ft.	450 ft.	825 ft.	1,000 ft.

*Range estimates are typical and require line of sight. Basically that means you will need a clear unobstructed view of the antenna from the remote point in the link. Keep in mind that walls and obstacles will limit your operating range and could even prevent you from establishing a link. Signals generally will not penetrate metal or concrete walls. Trees and leaves are obstructions to 802.11 frequencies so they will partially or entirely block the signal.

Other factors that will reduce range and affect coverage area include metal studs in walls, concrete fiberboard walls, aluminum siding, foil-backed insulation in the walls or under the siding, pipes and electrical wiring, furniture and sources of interference. The primary source of interference in the home will be the microwave oven. Other sources include other wireless equipment, cordless phones, radio transmitters and other electrical equipment.



For more information, visit us at www.L-com.com or call 1-800-343-1455 © L-com, Inc. All Rights Reserved.

* This image is from the original article, no copyright infringement intended.

Equipment in 2.4GHz

– other equipment in this frequency spectrum include microwave ovens, baby monitors, Bluetooth devices, cordless phones, routers, intercom systems, Steadicams, video transmitters, and many others.


W-DMX™

- Our technology is not based on any of these Wi-Fi standards, but it's relevant to mention the similarity in frequency range. We use the complete range of channels, but our technology is our own. In fact, because of the way we develop our software, our transmission can travel 10x the

Wi-Fi environment, we recommend to find out which is the predominant standard, and use W-DMX™ devices in the less congested band – for example, if 802.11g is in operation, you should use W-DMX™ on 5.8 GHz. There is a valid discussion to whether 2.4 GHz is better outdoors or indoors – you must consider the physical space outdoors, that might allow for a better spread in the air; or when indoors you might have more barriers and more devices to conflict with this band. You must consider all sorts of challenges when specifying to a complex installation.

It's relevant to understand that Wi-Fi is based on wideband (with DSSS, commonly used to send big chunks of data) where W-DMX™ is based on narrowband and frequency hopping. Wideband is needed for a larger volume of data – our technology does not need this as DMX data rate is only 0,25Mbit/s.

and something we actively implement and improve – in temporary applications, where there is very little time to survey, analyse or troubleshoot wireless networks, a system with a technology that adapts its radio transmission automatically depending on current radio traffic is needed – said system ensu-

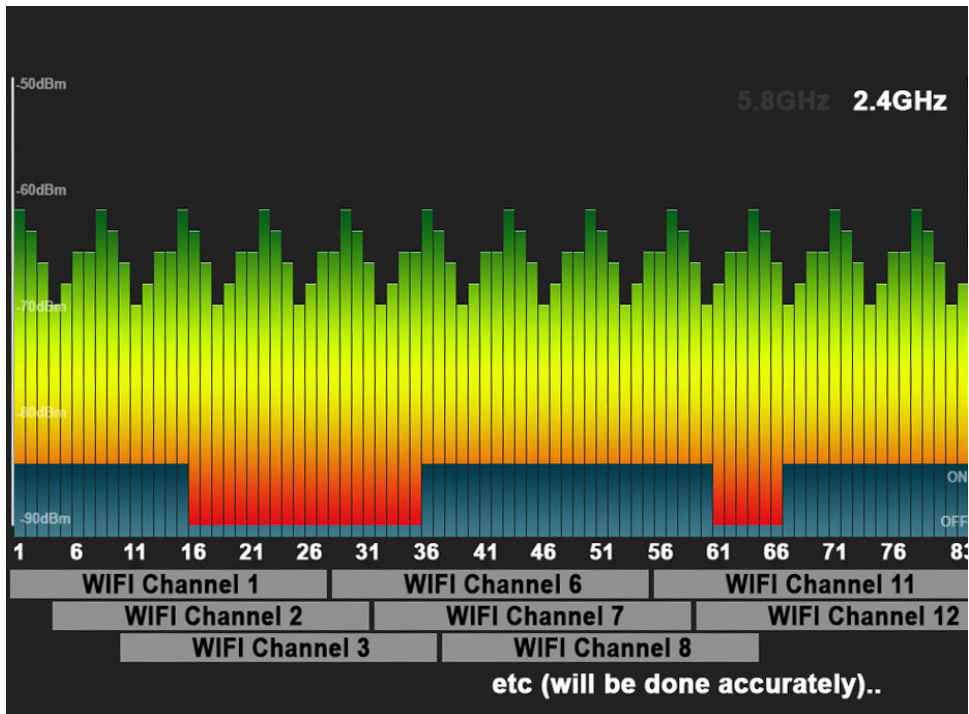

Because each Wi-Fi channel is 20MHz large, only 11 channels exist in the 2.4 GHz spectrum – there is physically not space for more. Our technology however does not require such a large space – each channel of W-DMX™ is only 1MHz wide, allowing for 77 channels to be used at the same time (77 narrowband channels are equivalent to 11 Wi-Fi channels of DSSS). Moreover, common Wi-Fi allows for channel overlapping (except in channels 1, 6 and 11 are non-overlapping), whereas W-DMX™ is a non-overlapping system. Adaptive Frequency Hopping is also very important to us,

res that the transmission is conducted interference free.

Our technology looks out for other wireless devices, avoiding overlapping with them, and jumping 1600 times per second on up to 77 narrow band channels within its frequency spectrum.

The adaptive feature constantly scans for background noise (caused by other wireless networks) and, if a channel gets interference, it gets removed automatically – once this interference goes away, the channel

automatically goes back to the hopping schedule.

Another great feature of W-DMX™ is our Data-Safe technology: in short terms, we send each DMX slot up to 4 times, in different radio packages, on different frequencies (or channels, one of those 77 we mentioned before). Each radio packet has integrity control – this means it will only be received if they are complete and consistent, so even if up to 3 data packages get corrupt (and therefore not received) we will still get the DMX information across the radio link. We also have a 192-bit encryption that acts like a defence mechanism, making sure that the data does not get altered – the original data coming in to the transmitter is the same than the one coming out of the receiver.


The other great benefit of W-DMX™ is Invisi-Wire: this is a technique to reproduce the timing information from the DMX controller. Since the DMX standard has a wide timing specification (there are several interesting articles on the web about this*) some fixtures may not work as well with certain consoles, even if they follow the right specification. Invisi-Wire reproduces the incoming timing when we resend the DMX data from the receiver. And even if the fixture does not work with all variations of the DMX timing specification, it will work wirelessly thanks to this technique.

MIMO (Multiple Input Multiple Output)

This is a method for multiplying the capacity of a radio link using multiple transmit and receive antennas, on the same radio channel at the same time, and explore multipath propagation. It increases link capacity and spectral efficiency combined with improved link reliability using what were previously seen as interference paths.

MU-MIMO (Multi-user MIMO)

It's a set of MIMO technology in which a set of users of wireless terminals, each with one or more antennas, communicate with each other. It is a more advanced form of the previous technology, that can leverage multiple users as spatially distributed transmission resources.

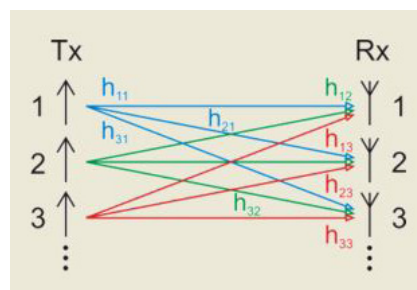

* This image is from the original article, no copyright infringement intended.

***Original article:** L-com. (2014, October 21). An A to Z review of the 802.11 standards. Retrieved May 23, 2016, from L-COM, <http://www.l-com.com/content/Article.aspx?Type=N&ID=10638>

Reference website for DMX timing:

*Doug Fleenor Design. Doug Fleenor design - DMX Primer. Retrieved June 3, 2016, from DFD, <http://www.dfd.com/primer.html>